

12 Color Programs (For RGB / RGBW ON/OFF)

- | | | |
|----|--------------------------|---|
| 1 | Butterfly Wings : | Cycles through white, purple, blue and green colors |
| 2 | Galaxy Eye : | The colors flashe quickly, full of energy |
| 3 | Rainbow Sky : | Gradual change blue-purple-red-yellow-cyan-green-purple |
| 4 | Summer Dream : | Blue and green appear alternately |
| 5 | France Romatic : | Transition between red, white and blue |
| 6 | Desert Passion : | Dramatic transitions of orange, red and purple |
| 7 | Mexico Night : | Richer and deeper color changes between red-purple-yellow-green |
| 8 | Ocean Heart : | Static Blue |
| 9 | Spring Green : | Static Green |
| 10 | Cherry Kiss : | Static Red |
| 11 | Noble White : | Static White |
| 12 | Lavender Love : | Static Purple |
| 13 | Hold Mode : | Lock the current mode |
| 14 | Return Mode : | Return to the previous locked mode |

Memorizing the color:

When power is switched off (more than 5 seconds) , the last color show mode or fixed color will be saved. The next time the light is powered on, the previously saved color show mode or fixed color will be displayed.

Hold: Save The Current Color During A Light Show

Press the "H" button to save the moment during the color show cycles, which will stop the color show cycle immediately, and the sixth static color will be Customized, Activated and Saved as "R".

Return: Return to the previously saved color.
Press "R" button to return the previously saved custom color at any time.

It's like choosing from an infinite color palette!

BSPOOL Light control WiFi Installation and Operation Guide



IMPORTANT SAFETY INSTRUCTIONS READ, FOLLOW AND SAVE THESE INSTRUCTIONS

**DANGER! FAILURE TO PROPERLY INSTALL AND
USE THIS PRODUCT CAN RESULT IN SERIOUS
BODILY INJURY OR DEATH.**



WARNING

*RISK OF ELECTRIC SHOCK OR ELECTROCUTION WHICH CAN
LEAD TO SERIOUS INJURY OR DEATH.*

*Always install at least 60 inches (5 ft) from inside wall of pool, spa or
fountain. Before attempting installation or service, ensure that all power
to the circuit supplying power to the system is disconnected/turned off at
the circuit breaker.*

*The BSPOOL Light Controller wiring circuit MUST be grounded and should be
installed by a Certified Pool Contractor.*

Note:

The BSPOOL Light control Controller must be wired to **AC120V or AC220V** circuit .
The BSPOOL Light Controller must be wired between the power source and the transformer, and requires low voltage transformer to produce low voltage 12V power for lights.

**DO NOT WIRE THE BSPOOL Light CONTROLLER
TO THE LOW VOLTAGE 12V SIDE OF THE TRANSFORMER.**

BSPOOL Light Controller PARAMETERS


Size : 165*110*73mm

Input : AC120V / 220V

Output: AC120V / 220V

Max Power : 400W

How to connect the lights with the BSPOOL Light Controller ?

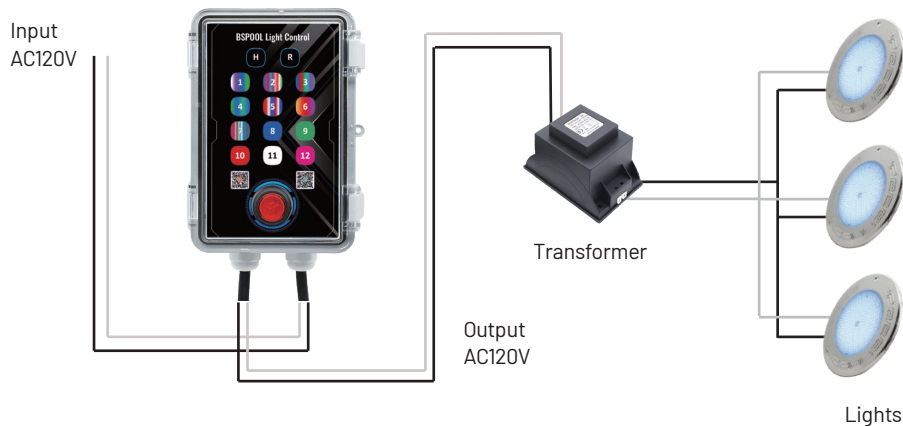

INPUT : Right terminal Black / White Cable

OUTPUT : Left terminal Black / White Cable

7) BSPOOL Light control supports voice control via smart speaker, for example Google Assistant and Alexa. You can issue simple voice commands, for example xx Turn on the swimming pool light” Turn off the swimming pool light” “Turn toButterfly Wings”



Google Assistant




Alexa

NOTE: If your Pool/Spa Lights were previously controlled by a Wall Switch or an Automatic Timer, it will override the BSPOOL Light Controller settings.


*Ensure any pre-existing automatic timers or switches are **"ON"**.

The BSPOOL Light Controller will not be able to Power "ON" if your existing Wall Switch or Automatic Timer is in the "OFF" Position.

2) Create TUYA or Smart Life account & Log into the account. Add the devices.

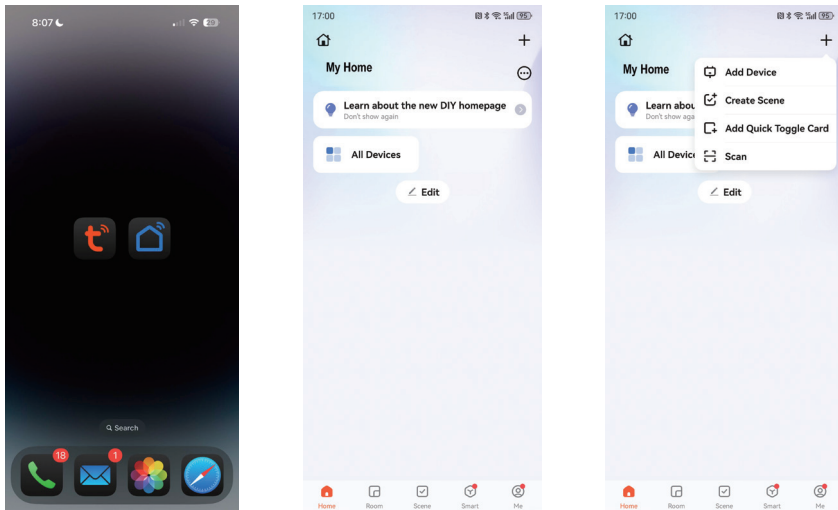


3) Press **button 1** and **hold the button for 10 seconds** until the indicator light turns green. Release the button & scan for devices on the mobile phone. **Select** the Controller Device for "Pool Lights" after the device is found.

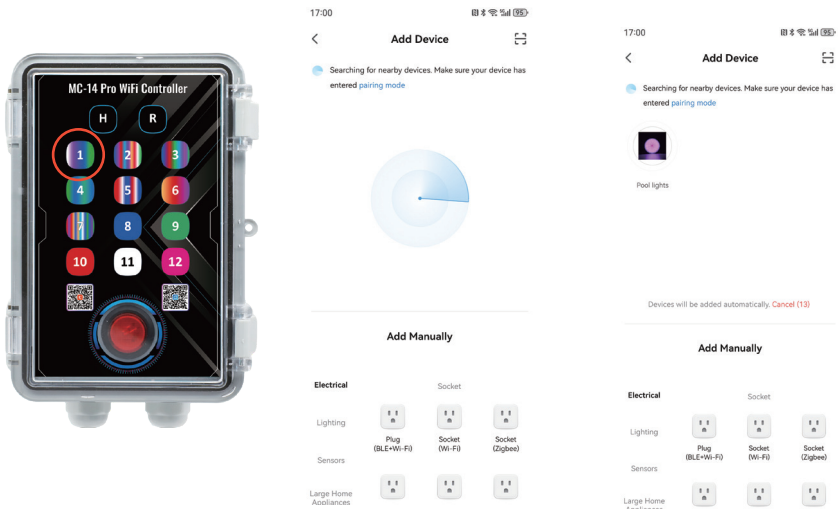


4

4) Once the WiFi network is found, enter the WiFi password and connect & Rename the light as desired.

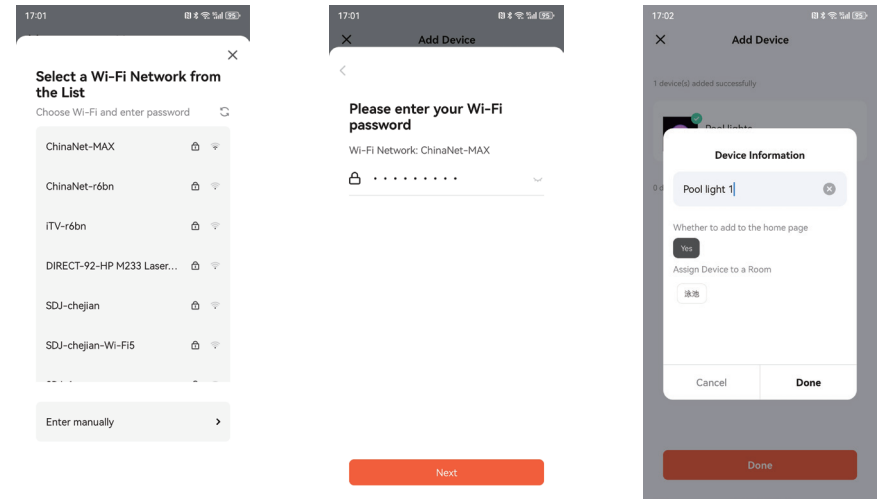


5) Access the operating interface to set a timer for turning ON and OFF.

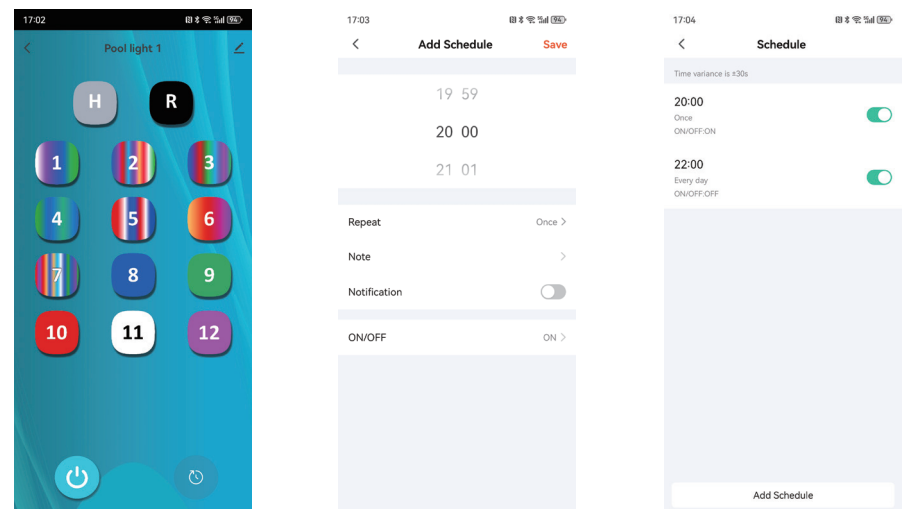

5

6) If you connect two or more BSPOOL Light Controllers to the same account, you can create a **"group"** to control them together. Tap the "+" button and select "Create Group". Once configured, you can control each box individually or the entire group together for synchronized operation.

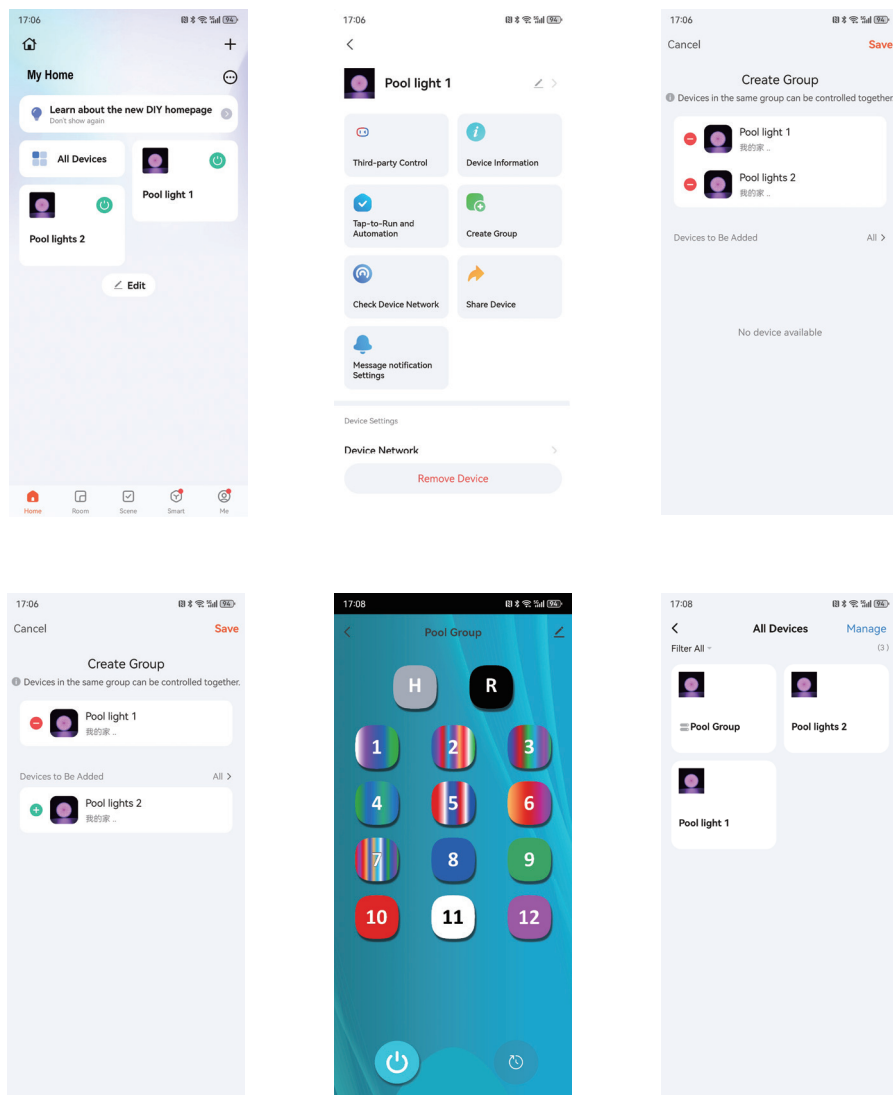

BSPOOL Light CONTROLLER OVERVIEW

The BSPOOL Light Controller provides complete control of MAXILLUM Pool/Spa Lights. It is easy to select a lighting feature, just press any one of the pre-programmed color light shows or fixed color buttons. The button indicator light will illuminate the active selection. **You can also program the "R" button for a sixth static color of your choice.**



How to connect the BSPOOL Light Controller to WiFi?

1) Scan the QR code to download the TUYA **OR** Smart Life APP.

* Smart Life APP is recommended



Smart Life



TUYA